SPARK FIRE RIBBON - DIRECT VENT 6FT





The extended Fire Ribbon makes a dramatic statement—high impact, while still sophisticated in design. A fixed ceramic glass window complements its sleek dimensions. This is the ultimate choice for a large, open space.









RIGHT SIDE VIEW

FRONT VIEW

TOP VIEW

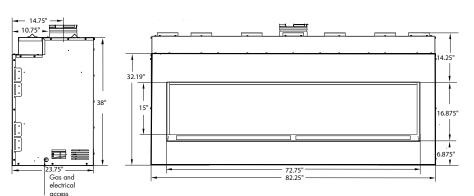

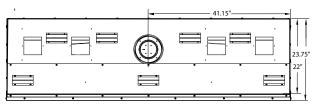

MODEL NO.

Viewing Area Exterior Dimension Framing Dimension Gas Type* Gas Connection On/Off Efficiency Venting Options

Vent Type

Fan
Electric
BTU input Natural gas
BTU input LP/propane
Doors/glass
Interior Color
Sustained operating gas
pressure parameters:

Certifications

Options

*Must be specified at time of ordering.

Note: This is a high throughput gas appliance and critical attention is needed to size the gas pipes properly.

19 with mandatory safety screen

72.25" W x 15" H
82.25" W x 32.19" H x 23.75" D
82.25" W x 38" H x 24.75" D
Natural or LP/Propane
1/2" pipe
Programmable / thermostatic remote control standard
Up to 80%
Through exterior wall or vertical through roof,
Must vent 3' vertically before horizontal venting.
Duravent DirectVent Pro 58DVA

Must source locally, not included. Controlled with hand held remote 110 V. 40,000 - 64,500 BTU/h 37,000 - 64,500 BTU/h Fixed ceramic glass panel Satin Black

4.5" - 10.5" w.c. for Natural gas 11.0" - 13.0" w.c. for LP/propane Omni-Test Laboratories ANSI Z21.88-2014, CSA 2.33-2014 CGA 2.17 - M91 (R2009), CSA P.4.1 - 09 (R2014) Fire Objects Media Tray, required when using fire objects

WHY PICK A SPARK FIRE RIBBON DIRECT VENT 6FT?

- Vent through the roof or exterior wall
- Up to 80% efficient
- Heating capacity enhanced with integrated fan
- Approved for bedrooms, bathrooms and all common rooms
- Accepted by all major building and mechanical codes in the U.S. including the IMC (International Building Code) and the UMC (Uniform Mechanical Code). Please check with local codes before ordering.
- Approved in all 50 states and Canada
- No draft concerns
- Safety of fixed ceramic glass

