Fire Ribbon Direct Vent 6 ft with mandatory safety screen

Model No.	**19**
Viewing Area	72.25" W x 15" H
Exterior Dimension	82.25" W x 32.19" H x 23.75" D
Framing Dimension	82.25" W x 38" H x 24.75" D
Gas Type*	Natural or LP/Propane
Gas Connection	1/2" pipe
On/Off	Programmable / thermostatic remote control standard
Efficiency	Up to 80%
Venting Options	Through exterior wall or vertical through roof, Must vent 3' vertically before horizontal venting.
Vent Type	Duravent DirectVent Pro 58DVA Must source locally, not included.
Fan	Thermostat activated 160 c.f.m.
Electric	110 V.
BTU input Natural gas	40,000 - 64,500 BTU/h
BTU input LP/propane	37,000 - 64,500 BTU/h
Doors/glass	Fixed ceramic glass panel
Interior Color	Satin Black
Sustained operating gas pressure parameters:	Natural gas 4.5" - 10.5" w.c. LP/propane 11.0" - 13.0" w.c.
Certifications	Omni-Test Laboratories ANSI Z21.88-2009 CSA 2.33-2009
Options *Must be specified at time of ordering.	Fire Objects and Media Tray* Power Venting Heat redistribution kit *required when using fire objects

Note:
This is a high throughput gas appliance and critical attention is needed to size the gas pipes properly.

Front view

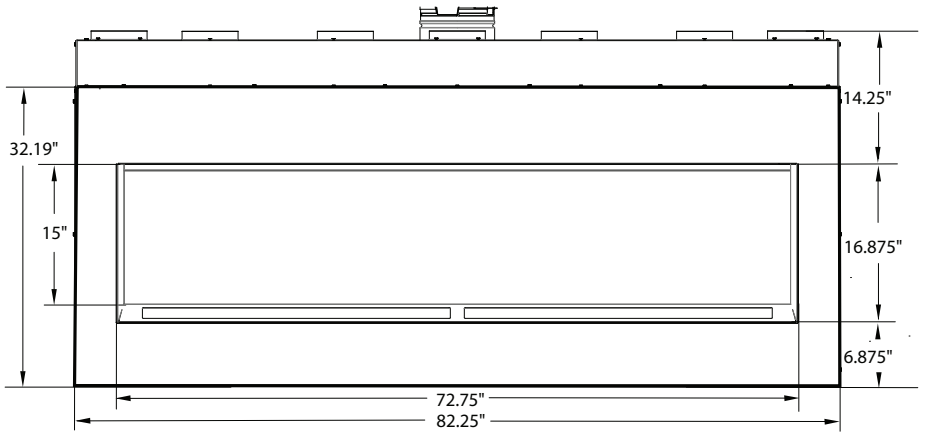

Top view

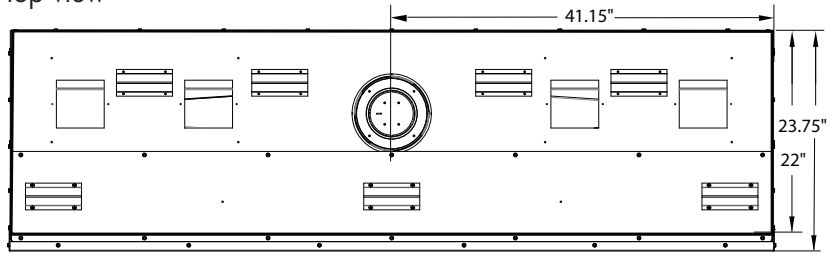
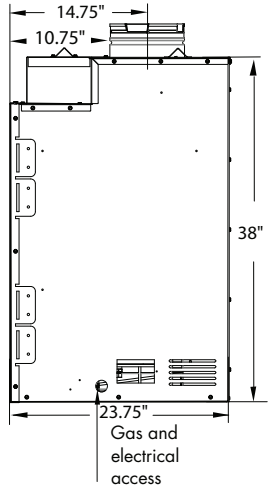
Right side view