

FIRE TABLE

Model No. FT36, FT48, FT60, FT72, FT84, FT96, FT108

Exterior Dimension See chart below*
 Gas Type** Natural Gas or Propane
 On/Off Electric Ignition system with ON/OFF
 Timer remote control

Sustained operating gas pressure parameters: Natural Gas 4.5" - 10.5" w.c.
 LP/Propane 11.0"-13.0" w.c.

Electric 110V with battery back up
 Burner Appearance Burner is submerged into bed of broken tempered glass
 Open Air Fire Open air - No glass
 Media Options Required tempered glass over the burner and approved SPARK fire objects for the side trays.

Enclosure Brushed Stainless steel enclosure with matching 304 stainless steel cover

Certifications Omni Test Laboratories.
 Complies with ANS Z21.97.CSA 2.41-2017
 "Outdoor Decorative Gas Appliances" And CSA 2.17-2017 "Gas-Fired Appliances for Use at High Altitudes"

MODEL*	L	A	B	Nat. Gas INPUT RATES:	Propane INPUT RATES:
FT36	36.13"	24.75"	33.75"	41,000 Btu/h	33,500 Btu/h
FT48	48.13"	36.75"	45.75"	61,000 Btu/h	54,000 Btu/h
FT60	60.13"	48.75"	57.75"	82,000 Btu/h	72,000 Btu/h
FT72	72.13"	60.75"	69.75"	102,000 Btu/h	90,000 Btu/h
FT84	84.13"	72.75"	81.75"	116,000 Btu/h	110,000 Btu/h
FT96	96.13"	84.75"	93.75"	129,000 Btu/h	128,000 Btu/h
FT108	108.13"	96.75"	105.75"	142,000 Btu/h	146,500 Btu/h


Options SPARK fire objects

**Must be specified at time of ordering


Note: This is a high throughput gas appliance and critical attention is needed to size the gas pipes properly.

The Fire Table should not be installed in areas susceptible to saltwater corrosion or high winds. This product is not warranted against either condition.

FRONT

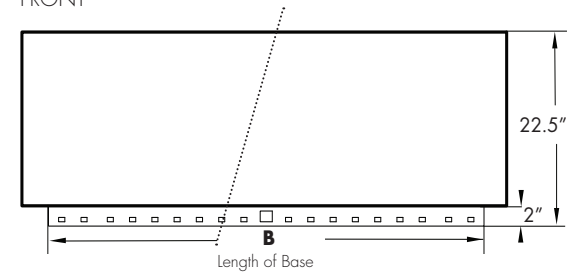

TOP

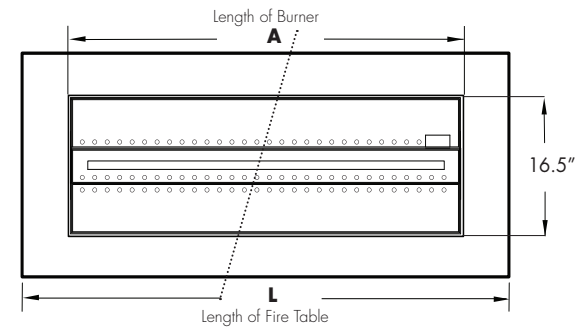

SIDE

