## Fire Ribbon Vent Free SLIM 46" with mandatory safety screen

## MODEL NO.

Viewing Area Exterior Dimension Framing Dimension

Gas Type\*
Gas Connection
On/Off
Efficiency
Venting Options
Vent Type
Fan
Electric

BTU input Natural gas BTU input LP/propane

Doors/glass Interior Color\*

Sustained operating gas pressure

parameters:

Certifications Options

\*Must be specified at time of ordering.

**Note:** This is a high throughput gas appliance and critical attention is needed to size the gas pipes properly.


## **46VF**


45.84"W x 11.96"H
58.40"W X 25.25"H X 7.85"D
Rear: O", Left: 6", Right: 6", Ceiling: 12",
Floor 3"
Natural or LP/propane models available
3/8" pipe
Programmable/thermostatic remote control
Up to 95%
None
None
None
None
23,000—37,000 BTU/h
25,000—37,000 BTU/h
None

None Black reflective porcelain enamel firebox liner

5.5" - 10.0" w.c. for natural gas 11.0" - 13.0" w.c. for LP/propane Omni-Test Laboratories ANSI Z21.11.2-2013 Surround options are satin black or stainless steel Media options: comes with Ebonyglass

Icealass optional

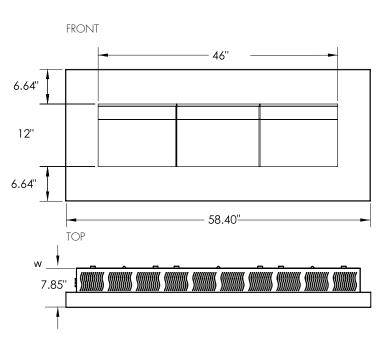



## **RESTRICTIONS:**

Vent-free fireplaces are prohibited in certain geographies. Please check local codes. Canada, California and New York City prohibit vent-free fireplaces. Vent-free fireplaces are also prohibited for use in bedrooms, bathrooms and above 4,500 ft in elevation.